

AUTOMATIC MOISTURE
CONTROL MACHINE
CONTRÔLEUR D'HUMIDITÉ
AUTOMATIQUE



INNOVATION
MORE THAN
JUST A WORD

AUTOMATIC MOISTURE CONTROL MACHINE

CONTRÔLEUR D'HUMIDITÉ
AUTOMATIQUE

The automatic moisture control machine is a machine with electro-mechanical properties, which ensure that the unground cereals and especially the products with different moisture ratios in flour factories, reach the desired moisture ratio in a precise and faultless manner.




HOW IT WORKS?

It ensures the measurement of moisture, temperature, flow rate, specific weight of the received product, and, based on these data, the necessary calculations to reach the desired moisture rate, thus automatically dosing the necessary amount of water. It sends pressurized water on the product in the forced dampening area, in line with the dosing.

Alapros®

OUTSTANDING FEATURES

- Durable and long-life construction
- Maximum operation efficiency, plus low energy consumption and operation cost
- High moisturizing rate
- Minimum and easy periodic maintenance
- Easy and rapid installation
- Automatic flow rate control and adjustable moisture ratio
- Stainless steel construction
- Compact, operator friendly design that ensures ease of maintenance and operation

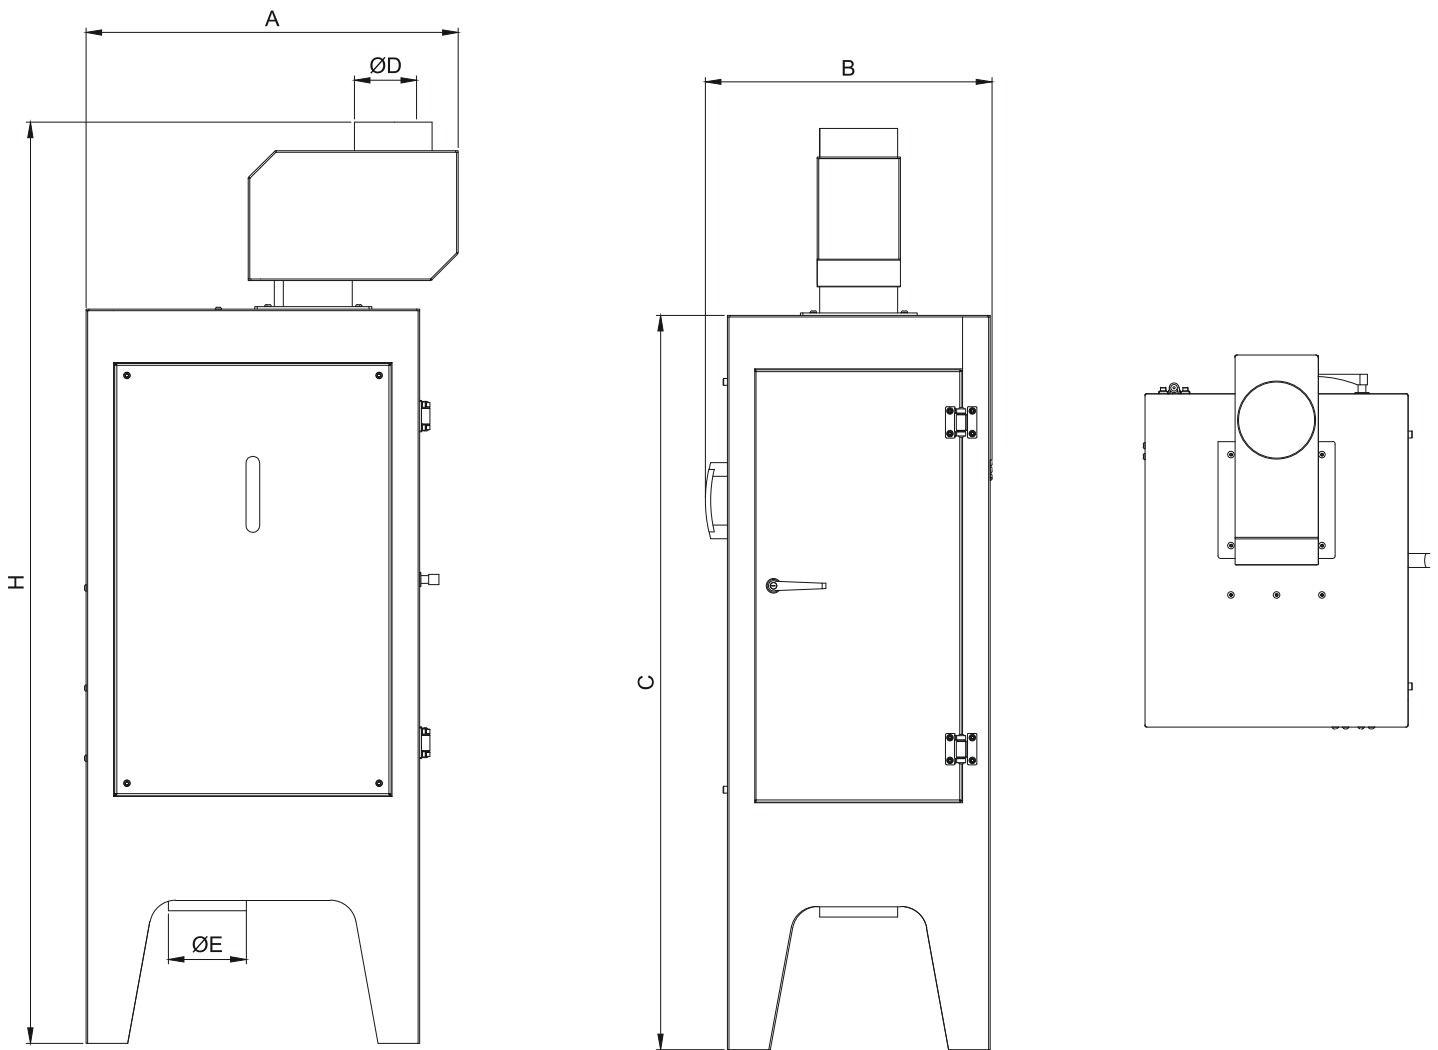

MODEL	DIMENSIONS mm.						WEIGHT kg.
	A	B	H	C	ØD	ØE	
AMC 25	715	550	1560	1410	150	150	140



Sales & Project Offices

Via Nona Strada 23 Z.I.
35129 Padova / ITALY
Phone : +39 049 099 0 383
sales@alapros.com

Ege Plaza
Mevlana Bulvarı
No: 182 Suite: 90
06530 ANKARA / TURKEY
Phone : +90 312 285 85 47

Production plant

OSB 12. Cad. No:17
19040 ÇORUM / TURKEY
Phone : +90 364 250 1250
Fax : +90 364 250 1255

info@alapros.com
www.alapros.com